

Application

The Zehnder ComfoAir 180 comfort ventilation unit was developed for use in a challenging residential environment. It combines maximum comfort, simple operation and a high level of efficiency with flexible integration in building services. The Zehnder ComfoAir 180 ventilation unit moves 180 m³/h of air at an external pressure of 170 Pa.

Level of efficiency

The integrated cross-counterflow heat exchanger achieves a level of efficiency of up to 95%. For user comfort this means: no unpleasant draft effects, because the supply air is heated almost to room temperature even at temperatures around freezing.

Fans

The two supply and extract fans are driven by efficient DC motors. Differential pressures in the supply and extract air distribution systems can be compensated thanks to direct control. The especially quiet fans can be adjusted to the required air flow in 1% steps. The air volumes of the selectable levels can be set between 30 m³/h and 180 m³/h on the Zehnder ComfoAir 180.

Filter

The Zehnder ComfoAir 180 ventilation unit is by standard equipped with class G4 filters (coarse particulate). An optional F7 pollen filter set consisting of a G4 coarse dust filter and F7 pollen filter is available.

Installation

The wall-mounted Zehnder ComfoAir 180 ventilation unit is characterised by its compact design. Due to the compact dimensions, the unit is ideal for installation in a kitchen cabinet or in a niche in the wall. The supply air connection on the ventilation unit can be repositioned to the left or right on site without having to open it. Alternatively, the supply air can also be connected at the bottom with DN125.

Operation

The ventilation unit is controlled with the ComfoSense control panel which is installed in living areas.

Maintenance

All maintenance servicing is simple to carry out on the Zehnder ComfoAir 180 ventilation unit. Filter replacement requires no tools thanks to the filter covers integrated in the front of the unit. The heat exchanger can also be easily removed from the unit for cleaning after opening the front. Please see the unit manuals for additional information about servicing tasks.



ComfoAir 180



ComfoSense



Wireless remote control

Frost protection

If the ventilation unit is operated without preheating, the condensate in the extract air may freeze. The frost protection setting prevents this by variably reducing the supply air volume. In order to ensure reliable operation even at extreme outside temperatures an integrated electrical preheater is optionally available ex works.

Bypass

During summer nights and between the seasons during periods of strong sunlight, the house often becomes too warm, while the outside air is pleasantly cool. In this case, the cooler outside air is supplied to the air distribution system, bypassing the heat recovery system. The Zehnder ComfoAir 180 ventilation unit is equipped with an automatic bypass for just this purpose. The bypass is a standard component and takes 100% of the extract air past the heat exchanger. The personal comfort temperature is adjustable.

Options

- **Electric pre-heater**
The integrated electrical pre-heater also guarantees continuous, frost-free operation even at temperatures below freezing point.
- **Humidity recovery with the Zehnder enthalpy exchanger**
The Zehnder enthalpy exchanger provides a hygienically ideal solution for excessively dry air in winter. Not only heat, but also the moisture contained in the extract air is transferred from the extract air to the supply air. Supply and extract air flows are kept completely separate: no transfer of odours or germs occur. The Zehnder enthalpy exchanger is easy to clean with water.
- **Pollen filter**
An optionally available pollen filter set keeps the inside of the house pollen-free and reduces the pollen load: breathe freely in times of increasing allergies.
- **Remote control**
Greater installation freedom. With the Zehnder wireless remote control the ventilation unit can be controlled from several switches located throughout the house or apartment.

Benefits

- Comfort ventilation up to 180 m³/h
- Heat recovery of up to 95%
- Low energy consumption thanks to EC fans
- Automatic 100% summer bypass
- Frost protection function: Efficient even at low temperatures
- Quick, safe installation and servicing
- Simple operation
- Filter replacement indicator
- Very compact dimensions: can be used flexibly in the kitchen (kitchen cupboard), bathroom (wall niche) or utility room
- Low minimum air volume, specially designed for residential buildings
- Integrated preheater (optional)
- Enthalpy exchanger (optional)

Article numbers

Description	Article numbers
ComfoAir 180	471 212 210
ComfoAir 180 V	471 212 215
ComfoAir 180 enthalpy	471 212 230
ComfoAir 180 V enthalpy	471 212 235

Accessories

ComfoSense 55 control panel	655 010 200
ComfoSense 67 control panel incl. cover and surface mounted housing	655 010 215
Remote-controlled control panel	655 000 755
CO ₂ -sensor	659 000 340
Humidity sensor	659 000 330

Filter

Filter set for ComfoAir 180 G4 (content: 2 pieces) Filter set	400 100 090
for ComfoAir 180 G4 / F7 (content: 2 pieces)	400 100 091

Equipment

Equipment	ComfoAir 180	ComfoAir 180 V	ComfoAir 180 ERV	ComfoAir 180 V ERV
Bypass	x	x	x	x
Preheater		x		x
Enthalpy exchanger			x	x

Tender specifications


The Zehnder ComfoAir 180 is a centralised, compact ventilation device with heat recovery and integrated summer bypass. This ventilation unit is eminently suited to new buildings as well as for apartment refurbishments. The housing, made of galvanised or painted sheet steel, is acoustically and thermally insulated. DC fans guarantee power-saving operation and provide high electrical efficiency. Supply and exhaust fans can be controlled separately and can be precisely adjusted to the balance air volume to within one percent. The core of Zehnder ComfoAir 180 is the plastic cross-counterflow heat exchanger with up to 95% heat recovery. It is controlled by a cabled ComfoSense control panel, which is connected to the ventilation unit by the on-site cable (YSTY 2 x 2 x 0.6). All operating statuses and error messages can be read from the control panel display. The Zehnder ComfoAir 180 is delivered ready to plug in and use. The filters are replaced easily from the front by the user without opening the unit. Zehnder ComfoAir 180 is mounted on the wall. The connection is typically made by the Zehnder ComfoPipe Plus twin-duct system, which also includes adapters to DN 125.

- Automatic frost protection controller
- Time-controlled filter replacement indicator
- Automatic and temperature-controlled 100% summer bypass
- Supply and extract fans can be activated separately
- Comfort temperature controller
- Weekly timer programmes
- Save ventilation mode for properties with chimney

General specifications

Heat exchanger	Plastic
Fans	EC DC fans
Material for interior cladding	EPP / PA
Filter	for extract air: G4 Outside air: G4 (optional F7 pollen filter)
Condensate connection	20 mm
Air duct connections	4 x rectangular, for ComfoPipe Plus twin duct optional supply air DN 125, bottom
Electrical connection	230 V, 50 Hz
Temperature ranges	7°C to 40°C in installation location, observe insulation requirements where necessary
Volume flow	maximum 180 m ³ /h, minimum 30m ³ /h
Dimension	Width: 560 mm Height: 680 mm Depth: 280 mm
Weight	22 kg

Dimensional drawing

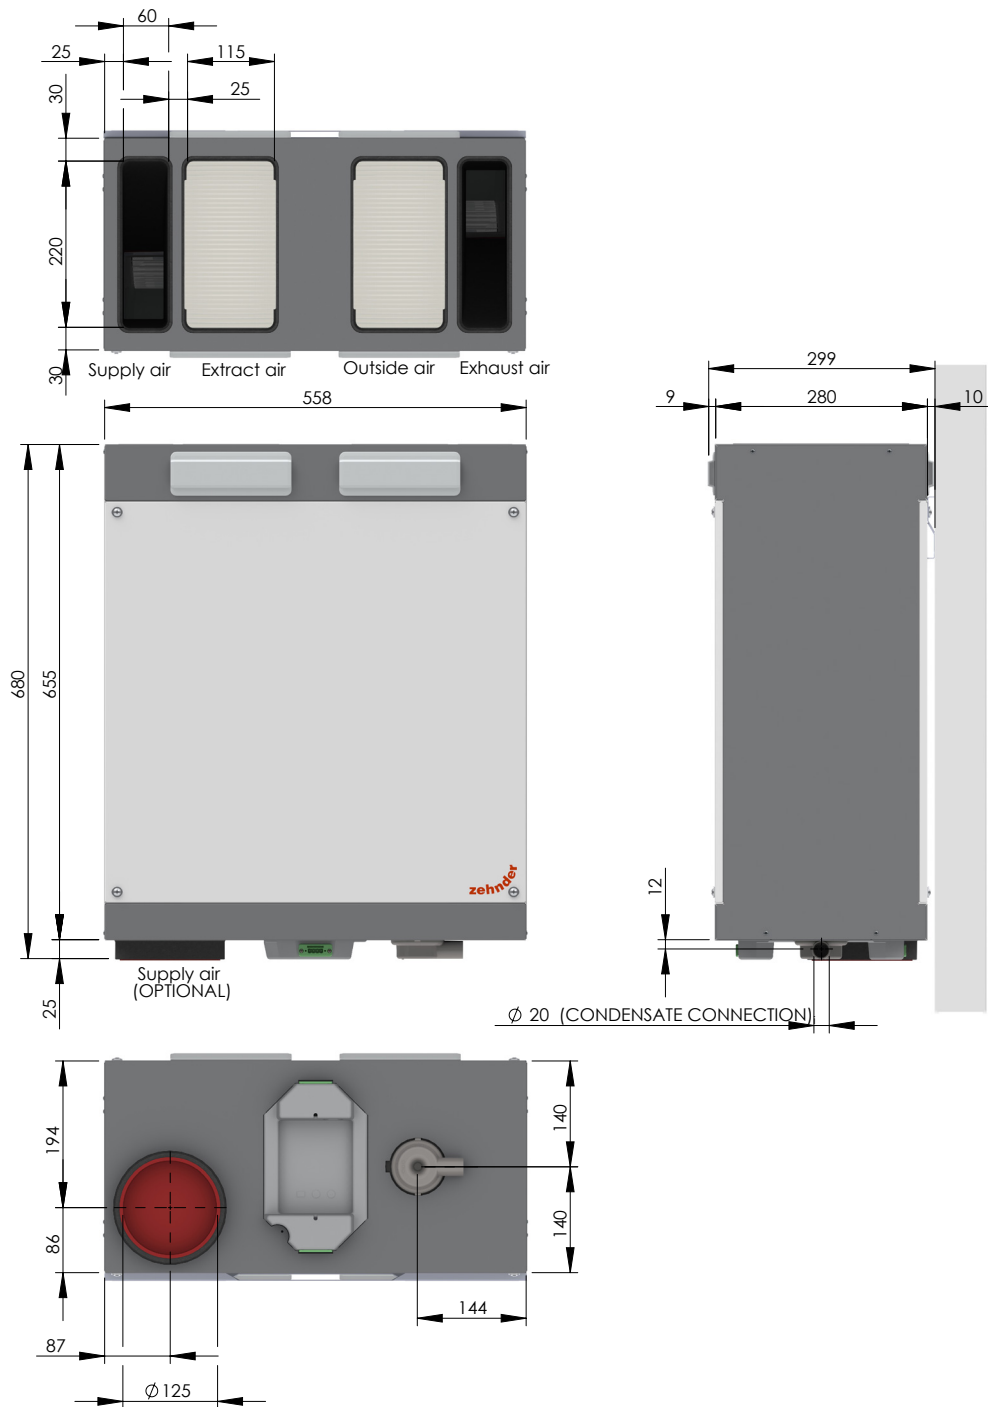

Ventilation unit

Zehnder ComfoAir 180

Sound, supply air/exhaust air

Sound power at connector at a distance of 0 m

Zehnder ComfoAir 180											
Speed level	Air volume Qv m³/h	Pressure ΔPst Pa	63 Hz dB	125 Hz dB	250 Hz dB	500 Hz dB	1000 Hz dB	2000 Hz dB	4000 Hz dB	8000 Hz dB	Summe dB(A)
15 %	28	3	62,9	48,7	36,1	24,5	24,9	10,3	12,9	48,9	39
20 % (1)	37	6	63,3	49,5	37,9	26,8	27,2	13,5	14,5	24,4	40
30 % (2)	55	14	64,5	51,7	42,8	33,1	33,1	22,0	18,9	23,6	42
40 % (3)	76	27	65,7	54,0	47,4	39,0	38,7	29,9	23,6	24,0	46
50 % (4)	97	44	66,9	56,3	51,6	44,2	43,6	36,8	28,4	25,5	49
60 % (5)	118	64	68,0	58,5	55,1	48,4	47,5	42,4	33,0	28,0	53
70 % (6)	141	92	69,4	61,2	58,7	52,7	51,4	47,9	38,6	32,5	57
80 % (7)	160	118	70,4	63,2	61,0	55,2	53,7	51,1	42,9	36,8	59
90 % (8)	179	148	71,6	65,4	63,2	57,5	55,7	53,8	47,6	42,6	62
100 % (9)	196	179	72,3	66,9	64,3	58,6	56,6	55,0	50,8	47,0	63

Sound, extract air/ outside air

Sound power at connector at a distance of 0 m


Zehnder ComfoAir 180											
Speed level	Air volume Qv m³/h	Pressure ΔPst Pa	63 Hz dB	125 Hz dB	250 Hz dB	500 Hz dB	1000 Hz dB	2000 Hz dB	4000 Hz dB	8000 Hz dB	dB(A)
15 %	28	3	63,6	43,5	34,6	21,7	17,3	8,1	12,2	22,8	38
20 % (1)	37	6	63,7	44,0	35,5	23,7	19,4	9,5	13,0	22,9	39
30 % (2)	55	14	64,1	45,7	38,2	29,1	25,6	13,3	15,3	23,3	40
40 % (3)	76	27	64,4	47,0	40,5	33,2	30,2	16,6	17,2	23,6	41
50 % (4)	97	44	64,8	49,1	43,9	38,5	35,9	21,5	20,0	24,0	43
60 % (5)	118	64	65,1	50,4	46,1	41,5	39,0	24,6	21,9	24,3	45
70 % (6)	141	92	65,5	52,6	49,8	45,8	43,1	30,0	25,1	24,8	48
80 % (7)	160	118	65,8	54,0	52,1	47,9	44,9	33,3	27,0	25,1	50
90 % (8)	179	148	66,2	55,7	55,0	49,9	46,4	37,4	29,4	25,5	52
100 % (9)	196	179	66,4	56,8	56,7	50,9	46,9	39,9	30,9	25,8	53

Sound, unit emission

Sound power level at unit at a distance of 0 m

Zehnder ComfoAir 180											
Speed level	Air volume Qv m³/h	Pressure ΔPst Pa	63 Hz dB	125 Hz dB	250 Hz dB	500 Hz dB	1000 Hz dB	2000 Hz dB	4000 Hz dB	8000 Hz dB	dB(A)
15 %	28	3	38,0	28,9	29,7	23,2	14,0	9,7	13,7	24,1	27
20 % (1)	37	6	39,6	30,4	30,0	23,1	15,7	11,6	16,2	24,4	27
30 % (2)	55	14	39,1	31,4	32,9	26,8	20,4	13,8	15,8	24,3	30
40 % (3)	76	27	39,8	32,5	34,8	30,0	24,3	15,2	16,3	24,4	32
50 % (4)	97	44	40,8	35,3	37,9	32,3	28,6	20,1	19,0	24,7	35
60 % (5)	118	64	41,1	36,0	41,4	34,7	31,7	23,0	18,0	24,5	37
70 % (6)	141	92	42,6	39,4	43,2	38,1	35,1	26,8	22,4	25,2	40
80 % (7)	160	118	42,6	41,1	45,5	42,0	36,7	30,1	23,5	25,3	43
90 % (8)	179	148	44,1	42,9	47,8	43,1	39,0	32,5	25,3	25,3	45
100 % (9)	196	179	45,9	44,8	48,8	43,7	40,2	34,6	28,0	25,9	46

Level	Setting Percent %	Capacity Qv m3/h	Pressure ΔP_{st} Pa	Power consumption W	Current draw A	cos ϕ (-)	Weight kg
ComfoAir 180							
(-)	15%	28	3	7	0.08	0.39	22
(1)	20%	37	6	8	0.09	0.38	
(2)	30%	55	14	10	0.10	0.43	
(3)	40%	76	27	13	0.14	0.41	
(4)	50%	97	44	18	0.20	0.41	
(5)	60%	118	64	26	0.27	0.42	
(6)	70%	141	92	37	0.37	0.44	
(7)	80%	160	118	50	0.48	0.45	
(8)	90%	179	148	66	0.61	0.47	
(9)	100%	196	179	85	0.75	0.49	
ComfoAir 180 V							
Pre-heater switched on (-)							
	100%	184	177	1250	5.77	0.98	22

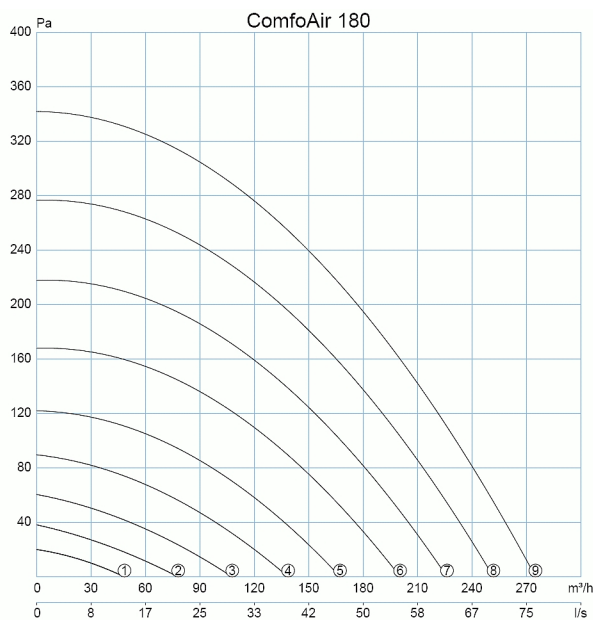

CDE-FLYERTS124, V1114, GBR, en, subject to change without notice